




MAGNETIC VALVE FOR DAMPERS

SPDA-01



Magnetic valve for pneumatic dampers AUDA, AUDF, AUDS and AUDR. Coils are available in 220 or 110 V AC and 24 V AC or DC.

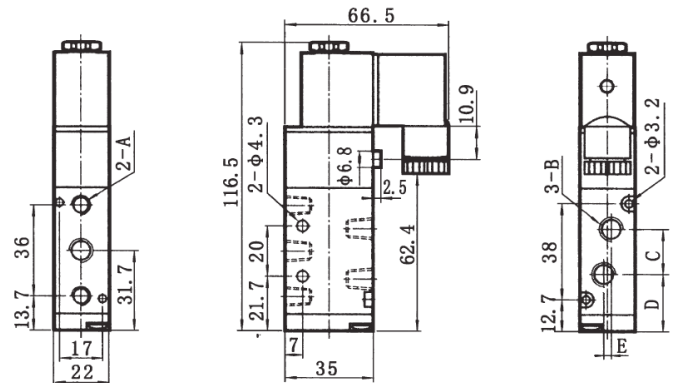


A	B	C	D	E	G
G 1/8	G 1/8	18	22,7	0	1/8"

Art.no	SPDA-01
Acting type	Internally pilot-actuated
Position number	2 Position 5 Way
Port size (G)	1/8"
Fluid	Air
Operating pressure (Mpa)	0,15-0,8
Temperature range	5-60°C
Voltage change	± 10%
Power consumption	AC:7,5VA DC:3W

SPDA-01 is used for dampers Ø50-500 mm, for bigger sizes double magnetic valve (SPDA-012) is needed.

COIL FOR MAGNETIC VALVE

SPDA-02/-021/-022/-023

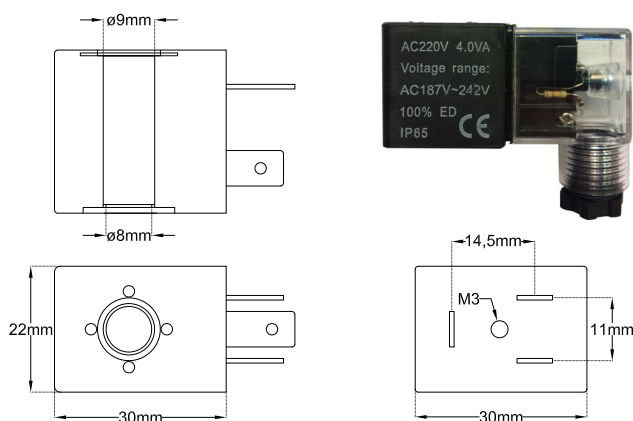

Art.no	Voltage	Insulation class	Connection type
SPDA-02	220 V AC	H	DIN43650B
SPDA-021	24 V DC	H	DIN43650B
SPDA-022	24 V AC	H	DIN43650B
SPDA-023	110 V AC	H	DIN43650B